

STS3000

3Ph Static Transfer Switch from 100A to 800A

HIGHLIGHTS

- High reliability
- Hot Replacement function
- 3- or 4-pole version
- Advanced communications

Installing a STS3000 Static transfer switch provides additional resilience and protection from the disruption that can be caused by the failure of a single power source. The result is the absolute protection of industrial utilities and critical information technology against power supply and load faults.

OPERATING PRINCIPLE

STS3000 guarantees a source of redundant power, allowing the load to be switched between to alternative and independent power sources. Switching can be automatic (when a supply source falls outside of acceptable tolerances) or manually done by an operator from the front panel or remotely.

PROTECTION AGAINST POWER SUPPLY FAULTS

If one of the two power sources falls outside tolerance levels, STS3000 will transfer the consumers to the second power source (Switching is instantaneous if the two sources are in phase).

PROTECTION AGAINST ENVIRONMENTAL DISTURBANCES

Overloads and load faults In the event of an overload.

The user can decide the level of intervention of the internal Protection devices in order to block the power supply.

In the extreme case of a downstream short circuit

STS3000 disconnects the load in order to avoid jeopardising

the operation of the other loads (i.e. in the event of poor selectivity of the protection devices).

TOTAL MICROPROCESSOR CONTROL

Microprocessor control logic ensures:

- Fast and safe switching between power sources;
- Monitoring of all parameters via LCD display;
- Constant monitoring of SCR operation
- Advanced remote diagnosis

REDUNDANT DESIGN

Power is supplied to the internal logic by two physically separate supply circuits that are fully independent and that can be replaced in "hot replacement" mode without causing power supply interruptions to the load. In the event that the power supplied by both sources fails, full system operation is guaranteed by the "Power Supply back up" function, which provides auxiliary power supply to the circuits from an external, independent power source. STS3000 is equipped with a dual redundant ventilation system known as: "fan redundancy plus". Thanks to this feature, and in the unlikely event that two fans fail at the same time, those remaining would still be able to dissipate the heat generated at nominal load and with an ambient temperature of up to 40° C. Also the fans can be replaced in "hot replacement" mode, ensuring continuity during the replacement operation.

SUPERIOR PROTECTION

In the event of an output short circuit, Master Switch blocks the transfer between the two power sources, eliminating the risk of propagating the short circuit and its effects to the other loads. A back feed control circuit ensures the automatic intervention of the protection devices when a return of power to one of the two Master Switch inputs is detected.

ACCESSIBILITY

The layout of the moving components and parts is designed to ensure easy frontal access:

- Power cable connections that are easily
- Accessed with entry from below; boards housed in a dedicated area for rapid diagnosis / replacement;
- All parts subject to monitoring, maintenance and/or replacement.

ADVANCED COMMUNICATIONS


STS3000 provides information, measurements, statuses, and alarms via the LCD display. The STS is compatible with PowerShield3 supervision and shutdown software for Windows operating systems 10, 8, 7, Hyper-V, 2019, 2016, 2012, and previous versions, Mac OS X, Linux, VMWare ESXi, Citrix XenServer and other Unix operating systems.

OPTIONS

- **SOFTWARE** (UPS management software - Supervision software)
- **ACCESSORIES** (SNMP-MODBUS- Serial link duplexer)
- **PRODUCT ACCESSORIES** (IP rating IP31- Power Supply Back-up)

LEDs	FUNCTION
L1	S1 Priority Source
L2	S2 Priority Source
L3	S1 Present
L4	S2 Present
L5	Static transfer switch SS1 closed
L6	Static transfer switch SS2 closed
L7	Alarm indicator
L8	Output selector ON/OFF

5 function keys and LCD operation

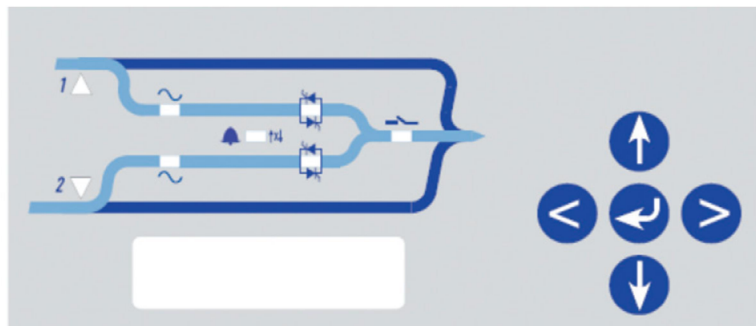


DIMENSIONS




STS3000 IN REDUNDANT MODE

The secondary power source [AS], although highly reliable, only powers the load in the event of a failure with the priority power source [PS], ensuring maximum redundancy and power quality to the loads.

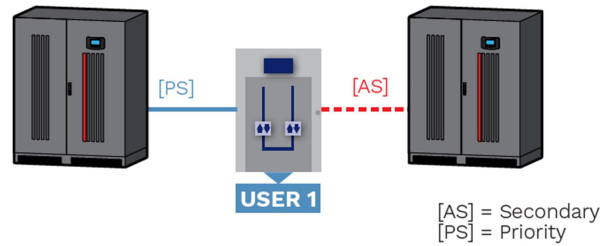


STS3000 IN CROSS FEEDING MODE

The two sources power critical loads using STS3000 configured to selected one of the two power sources as the priority source [PS]. In case of a failure in one of two sources, the other will be able to supply power to all the loads connected to the system.

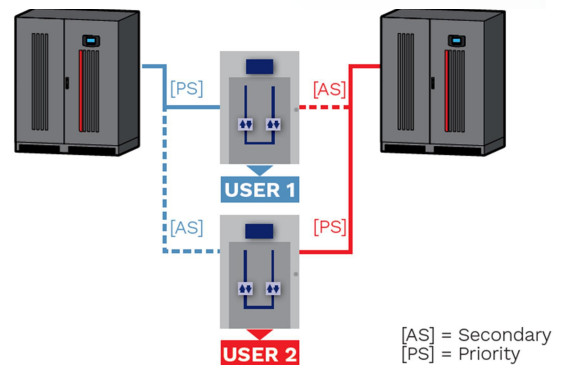

STS3000 IN BACK-UP MODE


STS3000 power utilities via the priority energy source [PS]; the secondary energy source [AS] is made up of independent, separate power sources and to make up for any faults in the priority power source [PS].

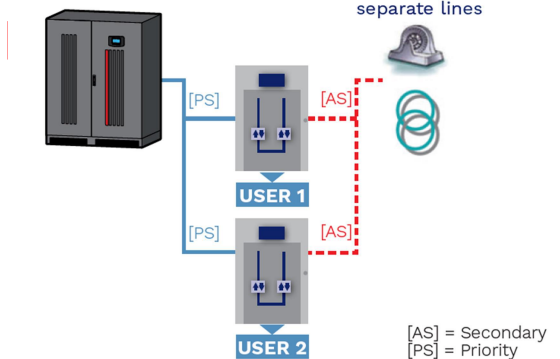

DYNAMIC DUAL BUS CONFIGURATION

The SATRON UPS solution guarantees maximum reliability and ensures continuity of power supply under all operating conditions thanks to the UGS option that keeps the two systems, A and B, perfectly synchronised.

The flexibility of the UGS system ensures synchronism between the sources even when one of the two systems is not a SATRON UPS model, but made by another manufacturer, or when the input sources are not from uninterruptible power supplies.

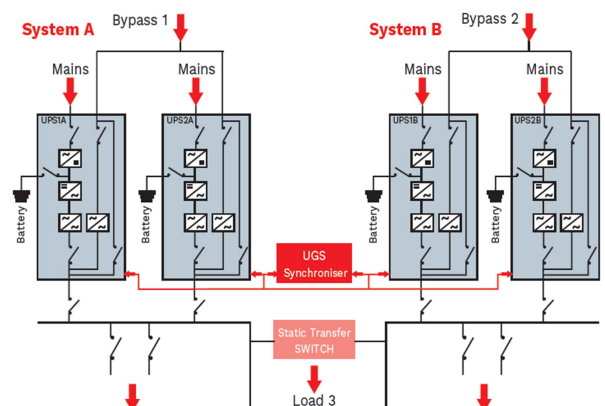

STS3000 - TECHNICAL SPECIFICATIONS

Model	STS100	STS150	STS200	STS250	STS300	STS400	STS600	STS800
NOMINAL CURRENT	100A	150A	200A	250A	300A	400A	600A	800A
INPUT								
Rated voltage - sources S1/S2 [V]	380 / 400 / 415 three-phase + N							
Voltage tolerance [V]	180 / 264 (selectable)							
Switched input phases	3+N (4-pole) - 3 (3-pole)							
Rated frequency [Hz]	50 / 60							
Input frequency tolerance range	±10% (selectable)							
Distribution compatibility	IT, TT, TNS, TNC							
OPERATING SPECIFICATIONS								
Transfer type	"Break Before Make" (no overlapping sources)							
Available transfer methods	Automatic / Manual / Remote							
Transfer time following source failure	<4 msec. (S1/S2 synchronised) 10 msec. (S1/S2 non synchronised)							
ENVIRONMENTAL SPECIFICATIONS								
Efficiency @ full load	>99%							
Noise at 1 m from front (from 0 to full load) [dBA]	55	55	55	55	55	55	<60	<62 dBA
Storage temperature	-10 °C up to +50 °C							
Ambient temperature for the UPS	0 °C - +40 °C							
Range of relative humidity	5-95% non-condensing							
Max. installation height	1000 m at nominal power (-1% power for every 100 m above 1000 m) - Max 4000 m							
Reference standard	EN 62310-1 (safety) EN 62310-2 (electro-magnetic compatibility)							
OVERALL SPECIFICATIONS								
Weight [kg] 3 pole Type	150	155	195	200	225	230	340	515
Weight [kg] 4 pole Type	155	160	205	210	235	240	375	560
Dimensions (WxDxH) [mm]	685x530x1500		685x580x1770				950x730 x1900	1250x850 x1905
Colour	RAL 7024							
IP rating	IP20							
Moving the STS	Pallet jack							



SATRON Power Solutions
 Approach your local SATRON Power Solutions
 representative for further support.
 Contact details can be found on:
www.satronpower.com